

**CMOS Rail-to-Rail General-Purpose Amplifiers**
**FEATURES**

- ▶ Single-supply operation: 2.7 V to 5.5 V
- ▶ Low supply current: 45  $\mu$ A/amplifier
- ▶ Wide bandwidth: 1 MHz
- ▶ No phase reversal
- ▶ Low input currents: 4 pA
- ▶ Unity gain stable
- ▶ Rail-to-rail input and output
- ▶ AEC-Q100 qualified for automotive applications

**APPLICATIONS**

- ▶ ASIC input or output amplifiers
- ▶ Sensor interfaces
- ▶ Piezoelectric transducer amplifiers
- ▶ Medical instrumentation
- ▶ Mobile communications
- ▶ Audio outputs
- ▶ Portable systems

**GENERAL DESCRIPTION**

The AD8541/AD8542/AD8544 are single, dual, and quad rail-to-rail input and output, single-supply amplifiers featuring very low supply current and 1 MHz bandwidth. All are guaranteed to operate from a 2.7 V single supply as well as a 5 V supply. These parts provide 1 MHz bandwidth at a low current consumption of 45  $\mu$ A per amplifier.

Very low input bias currents enable the AD8541/AD8542/AD8544 to be used for integrators, photodiode amplifiers, piezoelectric sensors, and other applications with high source impedance. The supply current is only 45  $\mu$ A per amplifier, ideal for battery operation.

Rail-to-rail inputs and outputs are useful to designers buffering ASICs in single-supply systems. The AD8541/AD8542/AD8544 are optimized to maintain high gains at lower supply voltages, making them useful for active filters and gain stages.

The AD8541/AD8542/AD8544 are specified over the extended industrial temperature range ( $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ ). The AD8541 is available in 5-lead SOT-23, 5-lead SC70, and 8-lead SOIC packages. The AD8542 is available in 8-lead SOIC, 8-lead MSOP, and 8-lead TSSOP surface-mount packages. The AD8544 is available in 14-lead narrow SOIC and 14-lead TSSOP surface-mount packages. All MSOP, SC70, and SOT versions are available in tape and reel only. See the [Ordering Guide](#) for automotive models.


**PIN CONFIGURATIONS**


Figure 1. 5-Lead SC70 and 5-Lead SOT-23 (KS and RJ Suffixes)




Figure 2. 8-Lead SOIC (R Suffix)

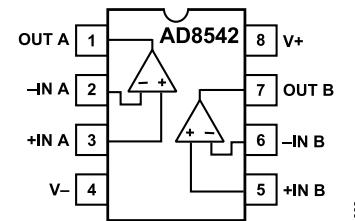


Figure 3. 8-Lead SOIC, 8-Lead MSOP, and 8-Lead TSSOP (R, RM, and RU Suffixes)

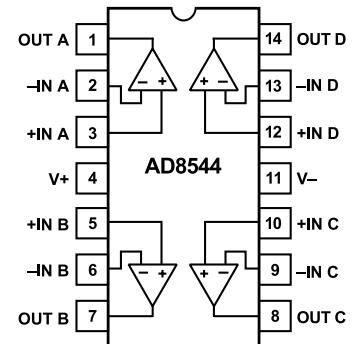


Figure 4. 14-Lead SOIC and 14-Lead TSSOP (R and RU Suffixes)

**TABLE OF CONTENTS**

Features.....	1	Theory of Operation.....	13
Applications.....	1	Notes on the AD854x Amplifiers.....	13
General Description.....	1	Applications Information.....	14
Pin Configurations.....	1	Notch Filter.....	14
Specifications.....	3	Comparator Function.....	14
Electrical Characteristics.....	3	Photodiode Application.....	14
Absolute Maximum Ratings.....	6	Outline Dimensions.....	16
Thermal Resistance.....	6	Ordering Guide.....	18
ESD Caution.....	6	Automotive Products.....	18
Typical Performance Characteristics.....	7		

**REVISION HISTORY****1/2024—Rev. G to Rev. H**

Changes to Features Section.....	1
Changes to Table 1 Title.....	3
Changes to Table 2 Title.....	4
Changes to Table 3 Title.....	5
Changes to Figure 21.....	9
Changed Applications Section to Applications Information Section.....	14

## SPECIFICATIONS

## ELECTRICAL CHARACTERISTICS

$V_S = 2.7$  V,  $V_{CM} = 1.35$  V,  $T_A = 25^\circ\text{C}$ , unless otherwise noted.

Table 1. 2.7 V Specifications

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
INPUT CHARACTERISTICS						
Offset Voltage	$V_{OS}$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		1	6	mV
					7	mV
Input Bias Current	$I_B$	$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$	4	60	pA	
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		100	pA	
Input Offset Current	$I_{OS}$	$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$	0.1	30	pA	
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		50	pA	
Input Voltage Range				500	pA	
Common-Mode Rejection Ratio	CMRR	$V_{CM} = 0$ V to 2.7 V	0	2.7	V	
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	40	45	dB	
Large Signal Voltage Gain	$A_{VO}$	$R_L = 100$ k $\Omega$ , $V_O = 0.5$ V to 2.2 V	38	100	500	V/mV
		$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$		50	V/mV	
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		2	V/mV	
Offset Voltage Drift	$\Delta V_{OS}/\Delta T$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		4	$\mu\text{V}/^\circ\text{C}$	
Bias Current Drift	$\Delta I_B/\Delta T$	$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$		100	$\text{fA}/^\circ\text{C}$	
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		2000	$\text{fA}/^\circ\text{C}$	
Offset Current Drift	$\Delta I_{OS}/\Delta T$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		25	$\text{fA}/^\circ\text{C}$	
OUTPUT CHARACTERISTICS						
Output Voltage High	$V_{OH}$	$I_L = 1$ mA	2.575	2.65	V	
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	2.550		V	
Output Voltage Low	$V_{OL}$	$I_L = 1$ mA	35	100	mV	
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		125	mV	
Output Current	$I_{OUT}$	$V_{OUT} = V_S - 1$ V	15		mA	
	$I_{SC}$			$\pm 20$	mA	
Closed-Loop Output Impedance	$Z_{OUT}$	$f = 200$ kHz, $A_V = 1$	50		$\Omega$	
POWER SUPPLY						
Power Supply Rejection Ratio	PSRR	$V_S = 2.5$ V to 6 V	65	76	dB	
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	60		dB	
Supply Current/Amplifier	$I_{SY}$	$V_O = 0$ V	38	55	$\mu\text{A}$	
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		75	$\mu\text{A}$	
DYNAMIC PERFORMANCE						
Slew Rate	SR	$R_L = 100$ k $\Omega$	0.4	0.75	V/ $\mu$ s	
Settling Time	$t_S$	To 0.1% (1 V step)		5	$\mu$ s	
Gain Bandwidth Product	GBP			980	kHz	
Phase Margin	$\Phi_M$			63	Degrees	
NOISE PERFORMANCE						
Voltage Noise Density	$e_n$	$f = 1$ kHz		40	$\text{nV}/\sqrt{\text{Hz}}$	
	$e_n$	$f = 10$ kHz		38	$\text{nV}/\sqrt{\text{Hz}}$	
Current Noise Density	$i_n$			<0.1	$\text{pA}/\sqrt{\text{Hz}}$	

## SPECIFICATIONS

$V_S = 3.0 \text{ V}$ ,  $V_{CM} = 1.5 \text{ V}$ ,  $T_A = 25^\circ\text{C}$ , unless otherwise noted.

Table 2. 3.0 V Specifications

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
INPUT CHARACTERISTICS						
Offset Voltage	$V_{OS}$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	1	6	7	$\text{mV}$
Input Bias Current	$I_B$	$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$	4	60	100	$\text{pA}$
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$			1000	$\text{pA}$
Input Offset Current	$I_{OS}$	$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$	0.1	30	50	$\text{pA}$
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$			500	$\text{pA}$
Input Voltage Range			0	3	3	$\text{V}$
Common-Mode Rejection Ratio	CMRR	$V_{CM} = 0 \text{ V}$ to $3 \text{ V}$	40	45	45	$\text{dB}$
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	38			$\text{dB}$
Large Signal Voltage Gain	$A_{VO}$	$R_L = 100 \text{ k}\Omega$ , $V_O = 0.5 \text{ V}$ to $2.2 \text{ V}$	100	500	500	$\text{V/mV}$
		$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$	50			$\text{V/mV}$
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	2			$\text{V/mV}$
Offset Voltage Drift	$\Delta V_{OS}/\Delta T$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	4	4	4	$\mu\text{V}/^\circ\text{C}$
Bias Current Drift	$\Delta I_B/\Delta T$	$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$	100	100	100	$\text{fA}/^\circ\text{C}$
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	2000			$\text{fA}/^\circ\text{C}$
Offset Current Drift	$\Delta I_{OS}/\Delta T$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	25	25	25	$\text{fA}/^\circ\text{C}$
OUTPUT CHARACTERISTICS						
Output Voltage High	$V_{OH}$	$I_L = 1 \text{ mA}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	2.875	2.955	2.955	$\text{V}$
			2.850			$\text{V}$
Output Voltage Low	$V_{OL}$	$I_L = 1 \text{ mA}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	32	100	125	$\text{mV}$
						$\text{mV}$
Output Current	$I_{OUT}$	$V_{OUT} = V_S - 1 \text{ V}$	18	18	18	$\text{mA}$
	$I_{SC}$			$\pm 25$	$\pm 25$	$\text{mA}$
Closed-Loop Output Impedance	$Z_{OUT}$	$f = 200 \text{ kHz}$ , $A_V = 1$	50	50	50	$\Omega$
POWER SUPPLY						
Power Supply Rejection Ratio	PSRR	$V_S = 2.5 \text{ V}$ to $6 \text{ V}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	65	76	76	$\text{dB}$
			60			$\text{dB}$
Supply Current/Amplifier	$I_{SY}$	$V_O = 0 \text{ V}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	40	60	75	$\mu\text{A}$
						$\mu\text{A}$
DYNAMIC PERFORMANCE						
Slew Rate	SR	$R_L = 100 \text{ k}\Omega$	0.4	0.8	0.8	$\text{V}/\mu\text{s}$
Settling Time	$t_S$	To 0.01% (1 V step)		5	5	$\mu\text{s}$
Gain Bandwidth Product	GBP			980	980	$\text{kHz}$
Phase Margin	$\Phi_M$			64	64	Degrees
NOISE PERFORMANCE						
Voltage Noise Density	$e_n$	$f = 1 \text{ kHz}$	42	42	42	$\text{nV}/\sqrt{\text{Hz}}$
	$e_n$	$f = 10 \text{ kHz}$	38	38	38	$\text{nV}/\sqrt{\text{Hz}}$
Current Noise Density	$i_n$				<0.1	$\text{pA}/\sqrt{\text{Hz}}$

## SPECIFICATIONS

$V_S = 5.0 \text{ V}$ ,  $V_{CM} = 2.5 \text{ V}$ ,  $T_A = 25^\circ\text{C}$ , unless otherwise noted.

Table 3. 5.0 V Specifications

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
INPUT CHARACTERISTICS						
Offset Voltage	$V_{OS}$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		1	6	mV
Input Bias Current	$I_B$	$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		4	60	pA
Input Offset Current	$I_{OS}$	$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		0.1	30	pA
Input Voltage Range			0	5		V
Common-Mode Rejection Ratio	CMRR	$V_{CM} = 0 \text{ V}$ to $5 \text{ V}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	40	48		dB
Large Signal Voltage Gain	$A_{VO}$	$R_L = 100 \text{ k}\Omega$ , $V_O = 0.5 \text{ V}$ to $2.2 \text{ V}$ $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	20	40		V/mV
Offset Voltage Drift	$\Delta V_{OS}/\Delta T$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		4		$\mu\text{V}/^\circ\text{C}$
Bias Current Drift	$\Delta I_B/\Delta T$	$-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		100		$\text{fA}/^\circ\text{C}$
Offset Current Drift	$\Delta I_{OS}/\Delta T$	$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		2000		$\text{fA}/^\circ\text{C}$
				25		$\text{fA}/^\circ\text{C}$
OUTPUT CHARACTERISTICS						
Output Voltage High	$V_{OH}$	$I_L = 1 \text{ mA}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	4.9	4.965		V
Output Voltage Low	$V_{OL}$	$I_L = 1 \text{ mA}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	4.875	25	100	mV
Output Current	$I_{OUT}$	$V_{OUT} = V_S - 1 \text{ V}$		125		mV
Closed-Loop Output Impedance	$I_{SC}$			30		mA
	$Z_{OUT}$	$f = 200 \text{ kHz}$ , $A_V = 1$		$\pm 60$		mA
				45		$\Omega$
POWER SUPPLY						
Power Supply Rejection Ratio	PSRR	$V_S = 2.5 \text{ V}$ to $6 \text{ V}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	65	76		dB
Supply Current/Amplifier	$I_{SY}$	$V_O = 0 \text{ V}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	60	45	65	$\mu\text{A}$
					85	$\mu\text{A}$
DYNAMIC PERFORMANCE						
Slew Rate	SR	$R_L = 100 \text{ k}\Omega$ , $C_L = 200 \text{ pF}$		0.45	0.92	$\text{V}/\mu\text{s}$
Full Power Bandwidth	$BW_P$	1% distortion			70	kHz
Settling Time	$t_S$	To 0.1% (1 V step)			6	$\mu\text{s}$
Gain Bandwidth Product	GBP				1000	kHz
Phase Margin	$\Phi_M$				67	Degrees
NOISE PERFORMANCE						
Voltage Noise Density	$e_n$	$f = 1 \text{ kHz}$		42		$\text{nV}/\sqrt{\text{Hz}}$
	$e_n$	$f = 10 \text{ kHz}$		38		$\text{nV}/\sqrt{\text{Hz}}$
Current Noise Density	$i_n$			<0.1		$\text{pA}/\sqrt{\text{Hz}}$

## ABSOLUTE MAXIMUM RATINGS

Table 4.

Parameter	Rating
Supply Voltage ( $V_S$ )	6 V
Input Voltage	GND to $V_S$
Differential Input Voltage <sup>1</sup>	$\pm 6$ V
Storage Temperature Range	-65°C to +150°C
Operating Temperature Range	-40°C to +125°C
Junction Temperature Range	-65°C to +150°C
Lead Temperature (Soldering, 60 sec)	300°C

<sup>1</sup> For supplies less than 6 V, the differential input voltage is equal to  $\pm V_S$ .

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

## THERMAL RESISTANCE

$\theta_{JA}$  is specified for the worst-case conditions, that is, a device soldered in a circuit board for surface-mount packages and measured using a standard 4-layer board, unless otherwise specified.

Table 5.

Package Type	$\theta_{JA}$	$\theta_{JC}$	Unit
5-Lead SC70 (KS)	376	126	°C/W
5-Lead SOT-23 (RJ)	190	92	°C/W
8-Lead SOIC (R)	120	45	°C/W
8-Lead MSOP (RM)	142	45	°C/W
8-Lead TSSOP (RU)	240	43	°C/W
14-Lead SOIC (R)	115	36	°C/W
14-Lead TSSOP (RU)	112	35	°C/W

## ESD CAUTION



**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## TYPICAL PERFORMANCE CHARACTERISTICS

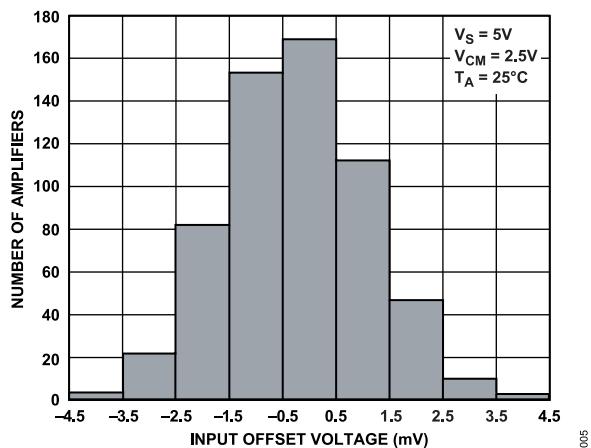


Figure 5. Input Offset Voltage Distribution

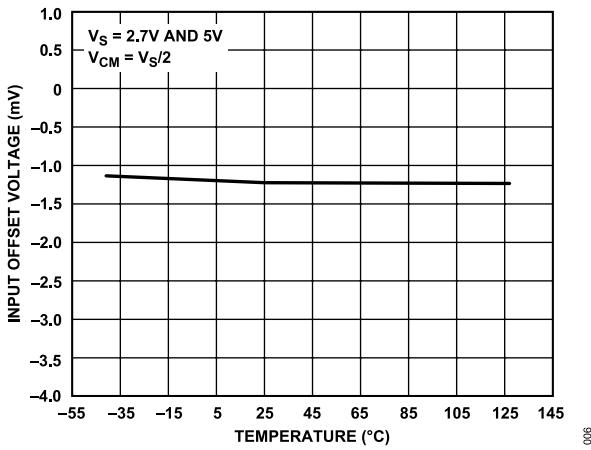


Figure 6. Input Offset Voltage vs. Temperature

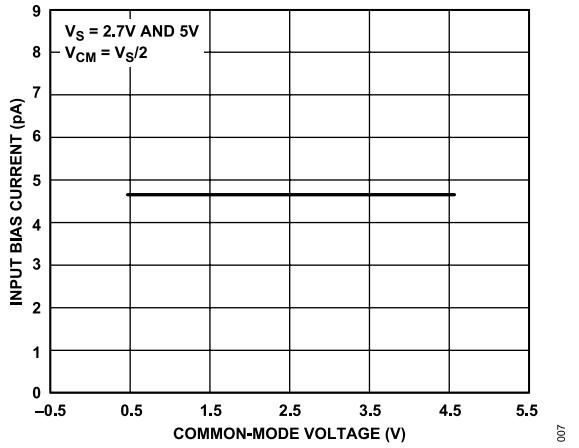


Figure 7. Input Bias Current vs. Common-Mode Voltage

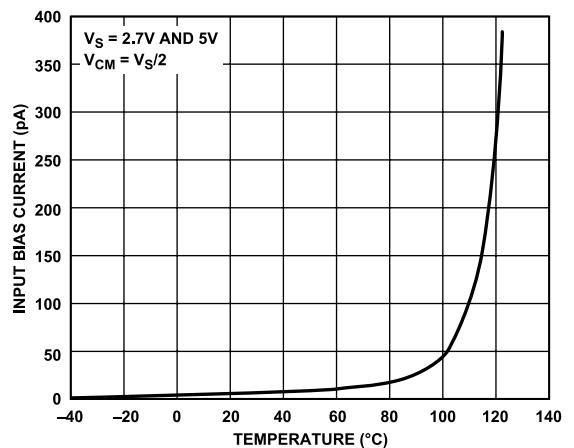


Figure 8. Input Bias Current vs. Temperature

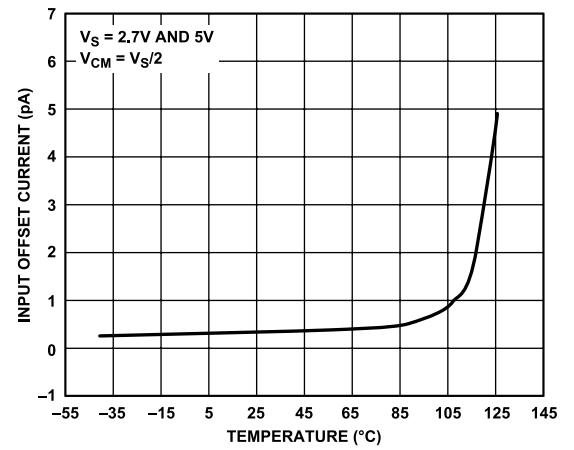


Figure 9. Input Offset Current vs. Temperature



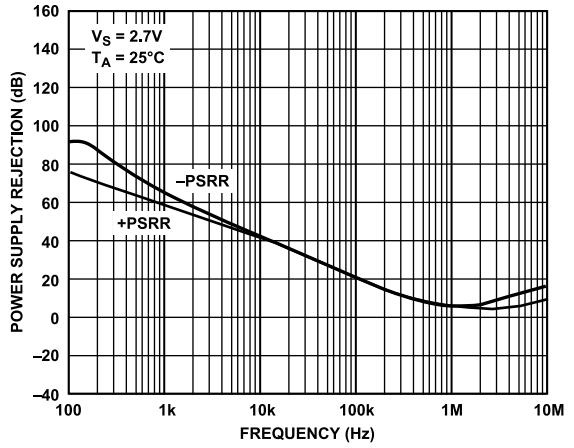


Figure 10. Power Supply Rejection vs. Frequency


## TYPICAL PERFORMANCE CHARACTERISTICS

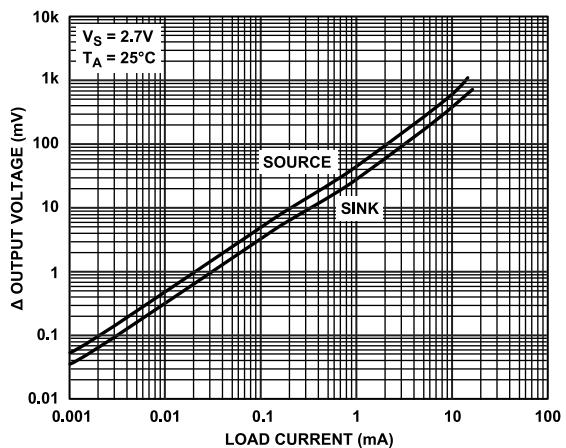


011

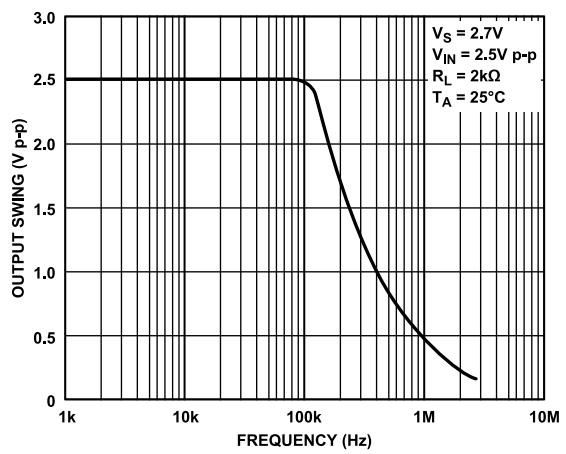


012

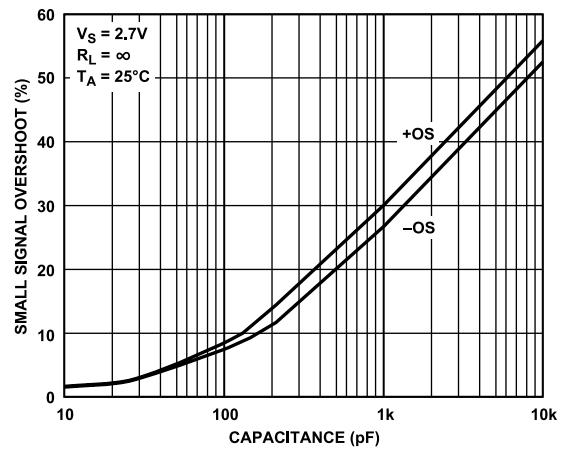


013

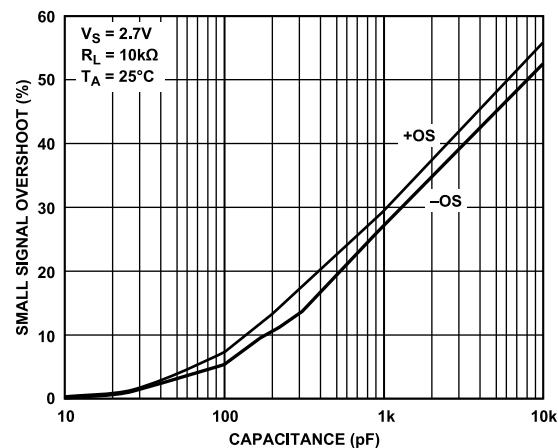

014

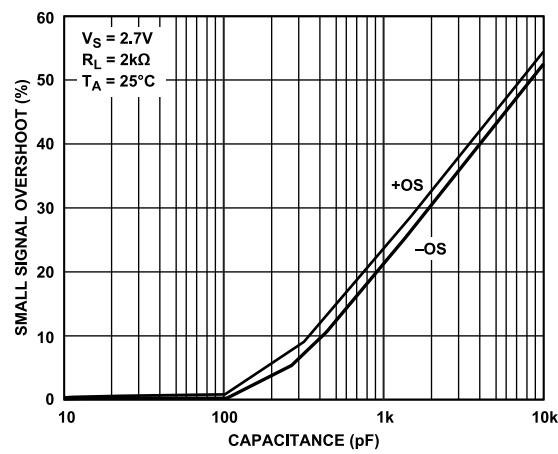

015

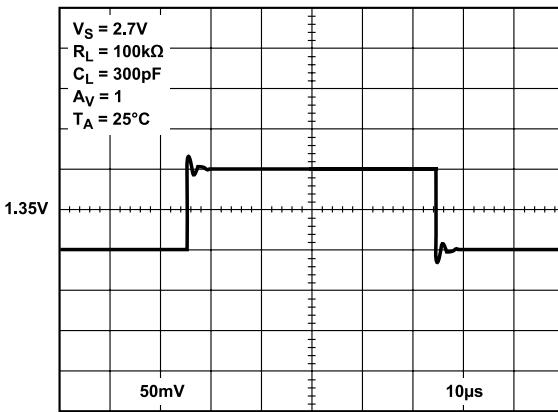

016

## TYPICAL PERFORMANCE CHARACTERISTICS

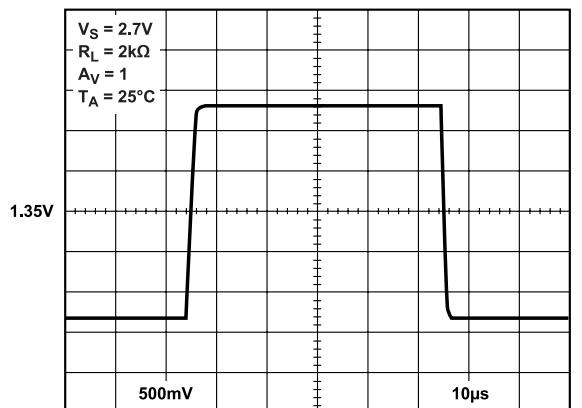


Figure 17. Large Signal Transient Response

017

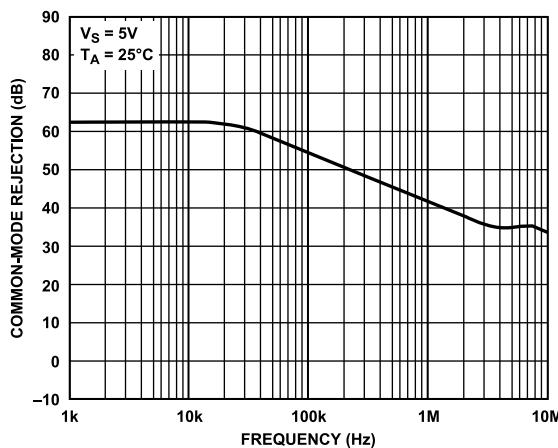


Figure 20. Common-Mode Rejection vs. Frequency

## TYPICAL PERFORMANCE CHARACTERISTICS

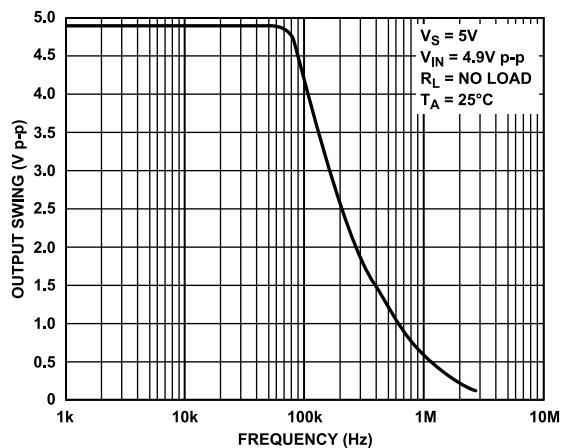


Figure 23. Closed-Loop Output Voltage Swing vs. Frequency

022

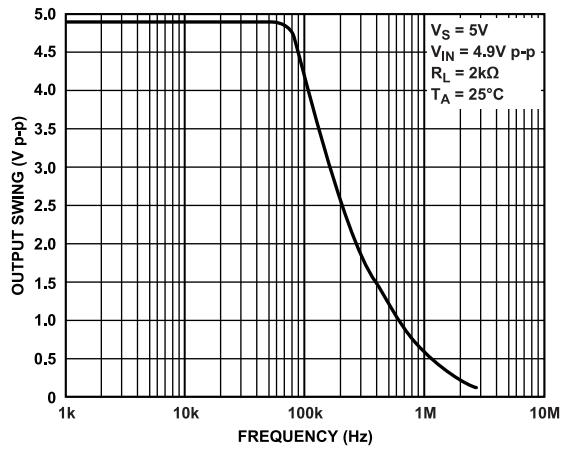


Figure 24. Closed-Loop Output Voltage Swing vs. Frequency

023

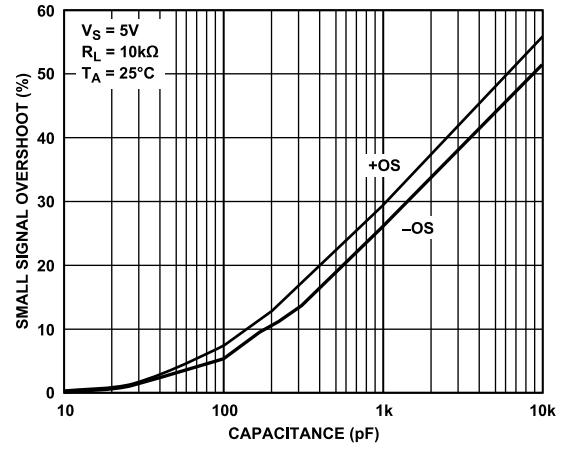


Figure 25. Small Signal Overshoot vs. Load Capacitance

024

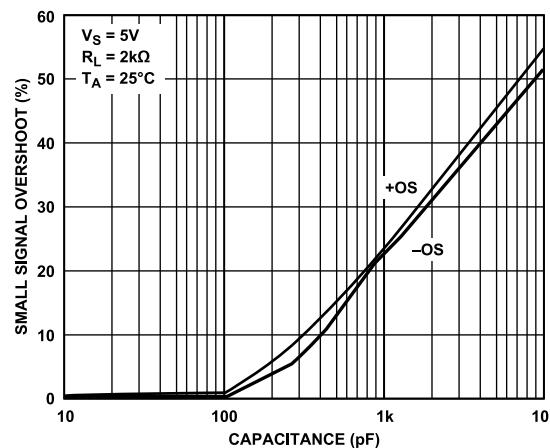


Figure 26. Small Signal Overshoot vs. Load Capacitance

025

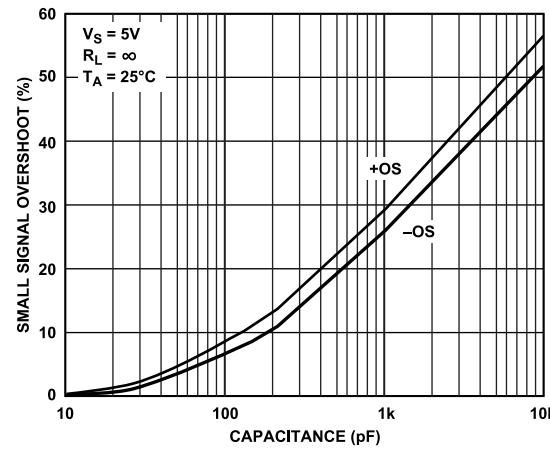


Figure 27. Small Signal Overshoot vs. Load Capacitance

026


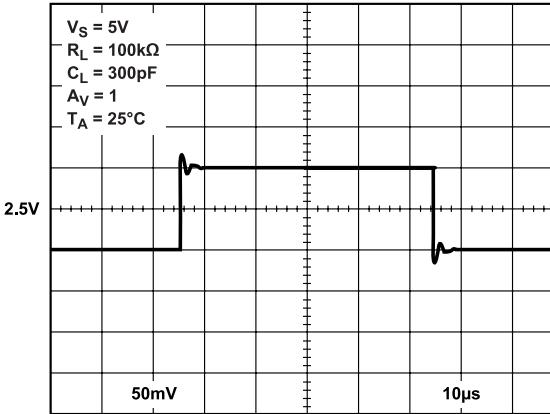



Figure 28. Small Signal Transient Response

027


## TYPICAL PERFORMANCE CHARACTERISTICS

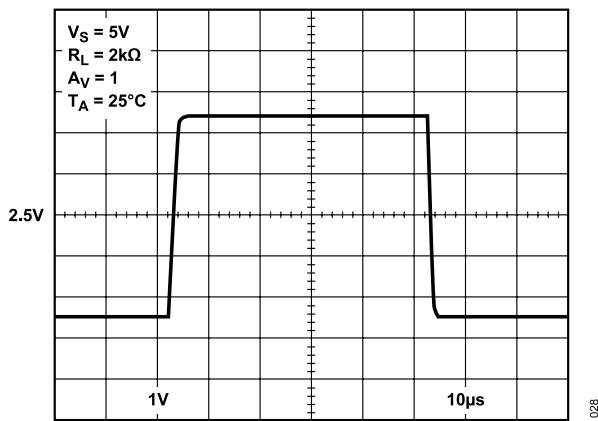


028

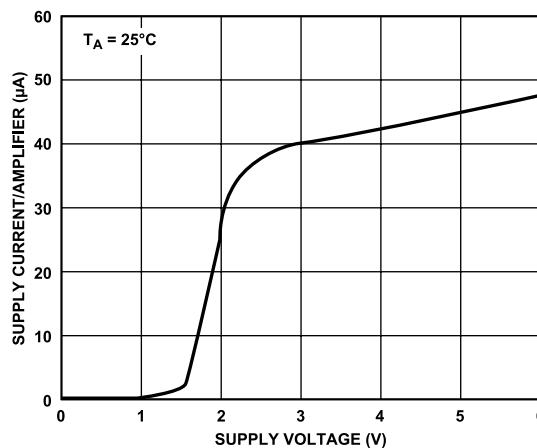


031

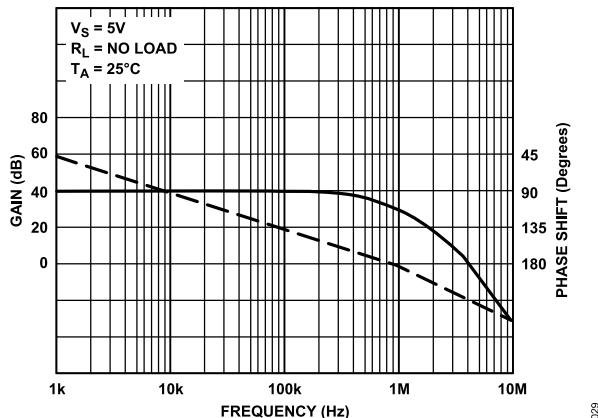


029

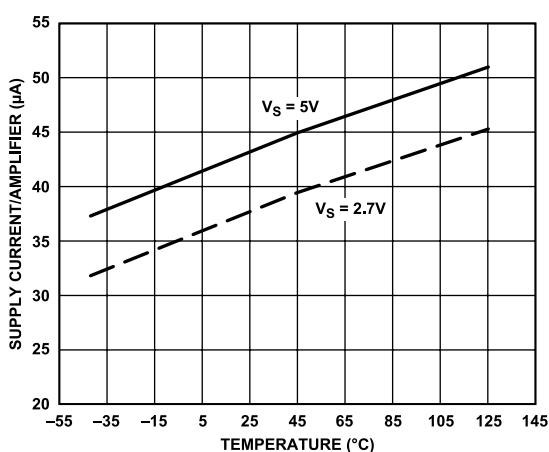

032

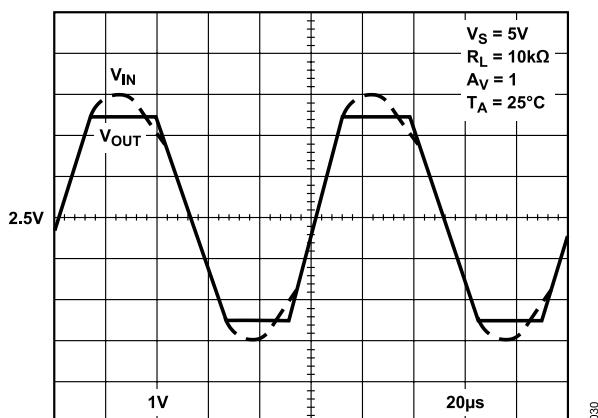

030

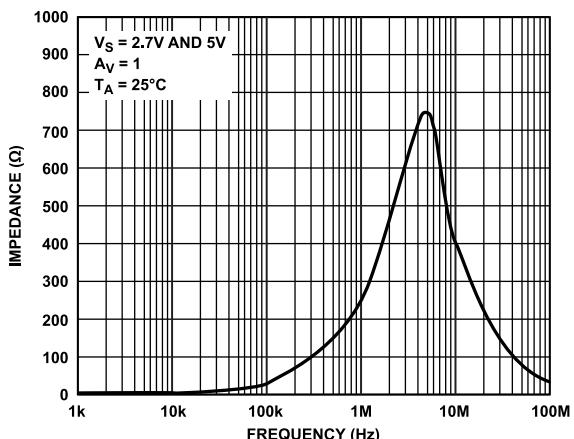

033

## TYPICAL PERFORMANCE CHARACTERISTICS

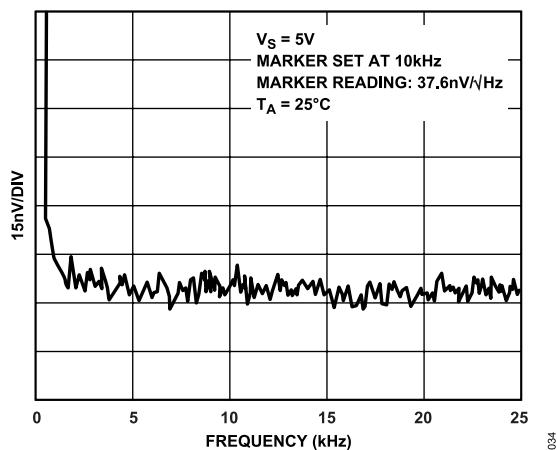


Figure 35. Voltage Noise

## THEORY OF OPERATION

### NOTES ON THE AD854X AMPLIFIERS

The AD8541/AD8542/AD8544 amplifiers are improved performance, general-purpose operational amplifiers. Performance has been improved over previous amplifiers in several ways, including lower supply current for 1 MHz gain bandwidth, higher output current, and better performance at lower voltages.

#### Lower Supply Current for 1 MHz Gain Bandwidth

The AD854x series typically uses 45  $\mu$ A of current per amplifier, which is much less than the 200  $\mu$ A to 700  $\mu$ A used in earlier generation parts with similar performance. This makes the AD854x series a good choice for upgrading portable designs for longer battery life. Alternatively, additional functions and performance can be added at the same current drain.

#### Higher Output Current

At 5 V single supply, the short-circuit current is typically 60  $\mu$ A. Even 1 V from the supply rail, the AD854x amplifiers can provide a 30 mA output current, sourcing, or sinking.

Sourcing and sinking are strong at lower voltages, with 15 mA available at 2.7 V and 18 mA at 3.0 V. For even higher output currents, see the AD8541/AD8542/AD8544 parts for output currents to 250 mA. Information on these parts is available from your Analog Devices, Inc. representative, and data sheets are available at [www.analog.com](http://www.analog.com).

#### Better Performance at Lower Voltages

The AD854x family of parts was designed to provide better ac performance at 3.0 V and 2.7 V than previously available parts. Typical gain bandwidth product is close to 1 MHz at 2.7 V. Voltage gain at 2.7 V and 3.0 V is typically 500,000. Phase margin is typically over 60°C, making the part easy to use.

## APPLICATIONS INFORMATION

## NOTCH FILTER

The AD854x have very high open-loop gain (especially with a supply voltage below 4 V), which makes it useful for active filters of all types. For example, Figure 36 illustrates the AD8542 in the classic twin-T notch filter design. The twin-T notch is desired for simplicity, low output impedance, and minimal use of op amps. In fact, this notch filter can be designed with only one op amp if Q adjustment is not required. Simply remove U2 as illustrated in Figure 37. However, a major drawback to this circuit topology is ensuring that all the Rs and Cs closely match. The components must closely match or notch frequency offset and drift causes the circuit to no longer attenuate at the ideal notch frequency. To achieve desired performance, 1% or better component tolerances or special component screens are usually required. One method to desensitize the circuit-to-component mismatch is to increase R2 with respect to R1, which lowers Q. A lower Q increases attenuation over a wider frequency range but reduces attenuation at the peak notch frequency.

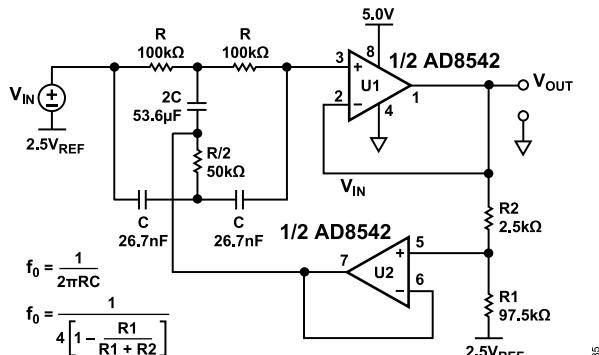


Figure 36. 60 Hz Twin-T Notch Filter, Q = 10

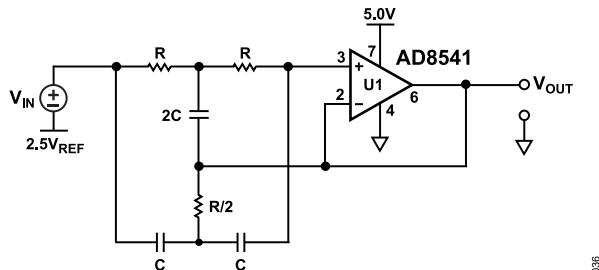


Figure 37. 60 Hz Twin-T Notch Filter, Q = ∞ (Ideal)

Figure 38 is an example of the AD8544 in a notch filter circuit. The frequency dependent negative resistance (FDNR) notch filter has fewer critical matching requirements than the twin-T notch, where as the Q of the FDNR is directly proportional to a single resistor R1. Although matching component values is still important, it is also much easier and/or less expensive to accomplish in the FDNR circuit. For example, the twin-T notch uses three capacitors with two unique values, whereas the FDNR circuit uses only two capacitors, which may be of the same value. U3 is simply a buffer that is added to lower the output impedance of the circuit.

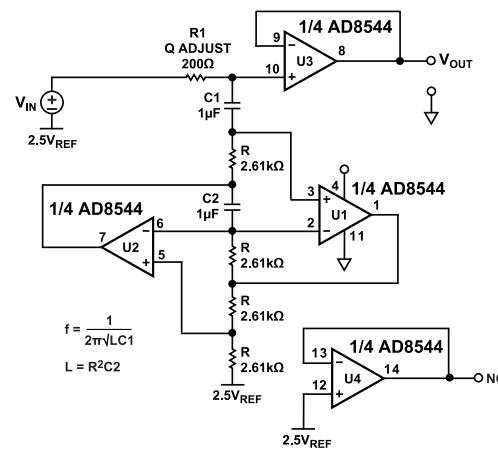


Figure 38. FDNR 60 Hz Notch Filter with Output Buffer

## COMPARATOR FUNCTION

A comparator function is a common application for a spare op amp in a quad package. Figure 39 illustrates 1/4 of the AD8544 as a comparator in a standard overload detection application. Unlike many op amps, the AD854x family can double as comparators because this op amp family has a rail-to-rail differential input range, rail-to-rail output, and a great speed vs. power ratio. R2 is used to introduce hysteresis. The AD854x, when used as comparators, have 5 μs propagation delay at 5 V and 5 μs overload recovery time.

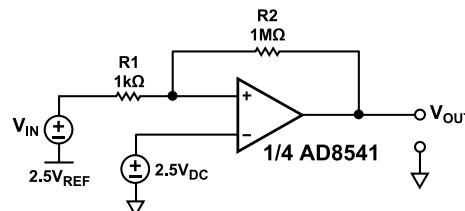


Figure 39. AD854x Comparator Application—Overload Detector

## PHOTODIODE APPLICATION

The AD854x family has very high impedance with an input bias current typically around 4 pA. This characteristic allows the AD854x op amps to be used in photodiode applications and other applications that require high input impedance. Note that the AD854x has significant voltage offset that can be removed by capacitive coupling or software calibration.

Figure 40 illustrates a photodiode or current measurement application. The feedback resistor is limited to 10 MΩ to avoid excessive output offset. In addition, a resistor is not needed on the noninverting input to cancel bias current offset because the bias current-related output offset is not significant when compared to the voltage offset contribution. For best performance, follow the standard high impedance layout techniques, which include the following:

- Shielding the circuit.
- Cleaning the circuit board.

## APPLICATIONS INFORMATION

- ▶ Putting a trace connected to the noninverting input around the inverting input.
- ▶ Using separate analog and digital power supplies.



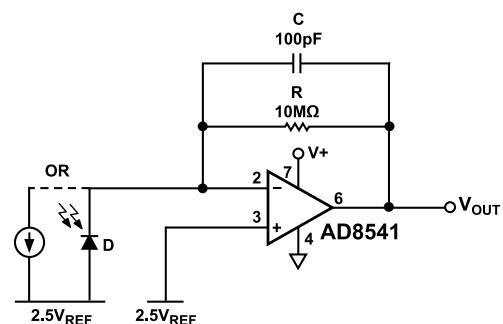


Figure 40. High Input Impedance Application—Photodiode Amplifier


## OUTLINE DIMENSIONS

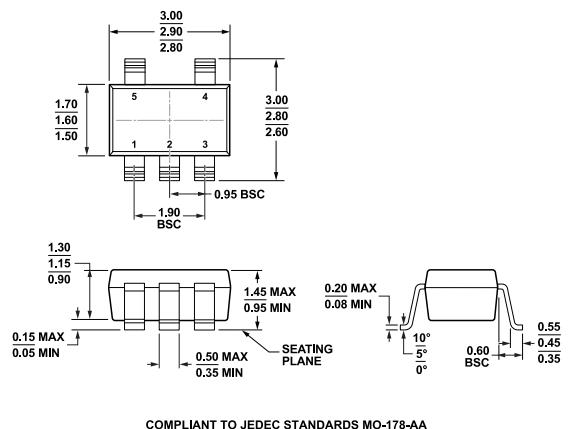

**Figure 41. 5-Lead Small Outline Transistor Package [SOT-23]  
(RJ-5)**  
Dimensions shown in millimeters

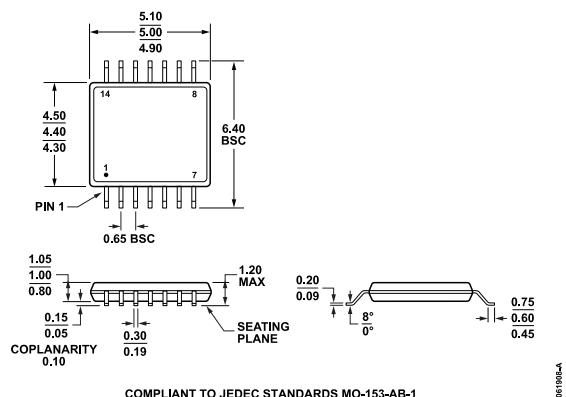


**Figure 42. 14-Lead Thin Shrink Small Outline Package [TSSOP]  
(RU-14)**  
Dimensions shown in millimeters

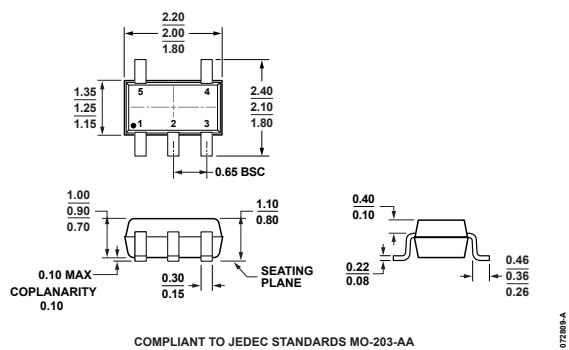


**Figure 43. 5-Lead Thin Shrink Small Outline Transistor Package [SC70]  
(KS-5)**  
Dimensions shown in millimeters


## OUTLINE DIMENSIONS

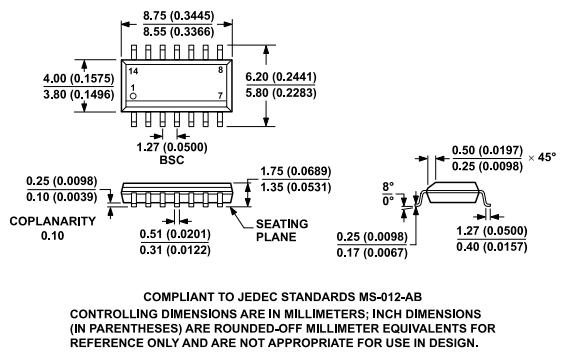

**Figure 44. 14-Lead Standard Small Outline Package [SOIC\_N]**  
**Narrow Body**  
**(R-14)**  
*Dimensions shown in millimeters and (inches)*

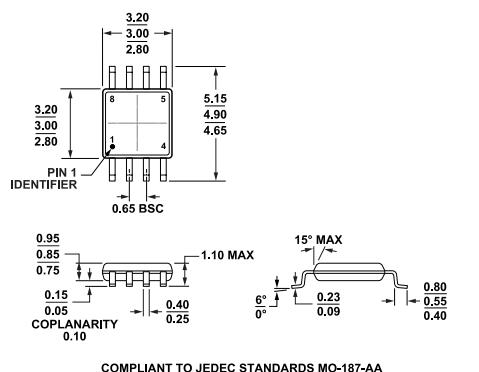

**Figure 45. 8-Lead Mini Small Outline Package [MSOP]  
(RM-8)**  
Dimensions shown in millimeters

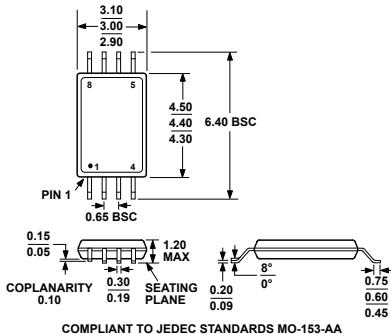

**Figure 46. 8-Lead Thin Shrink Small Outline Package [TSSOP]  
(RU-8)**  
Dimensions shown in millimeters

## OUTLINE DIMENSIONS

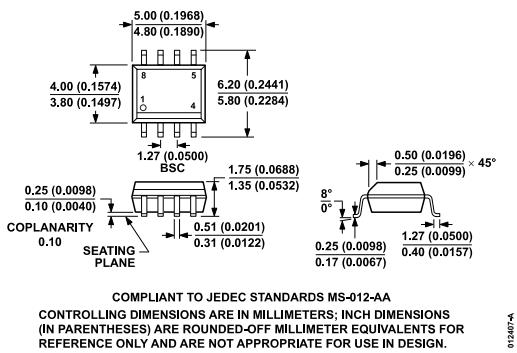


Figure 47. 8-Lead Standard Small Outline Package [SOIC\_N]  
Narrow Body  
(R-8)  
Dimensions shown in millimeters and (inches)

Updated: December 20, 2023

## ORDERING GUIDE

Model <sup>1,2</sup>	Temperature Range	Package Description	Packing Quantity	Package Option	Marking Code
AD8541AKSZ-REEL7	-40°C to +125°C	5-Lead SC70	Reel, 3000	KS-5	A12
AD8541ARTZ-REEL	-40°C to +125°C	5-Lead SOT-23	Reel, 10000	RJ-5	A4A
AD8541ARTZ-REEL7	-40°C to +125°C	5-Lead SOT-23	Reel, 3000	RJ-5	A4A
AD8541ARZ	-40°C to +125°C	8-Lead SOIC		R-8	
AD8541ARZ-REEL	-40°C to +125°C	8-Lead SOIC	Reel, 2500	R-8	
AD8541ARZ-REEL7	-40°C to +125°C	8-Lead SOIC	Reel, 1000	R-8	
AD8542ARMZ	-40°C to +125°C	8-Lead MSOP		RM-8	AVA
AD8542ARMZ-REEL	-40°C to +125°C	8-Lead MSOP	Reel, 3000	RM-8	AVA
AD8542ARUZ	-40°C to +125°C	8-Lead TSSOP		RU-8	
AD8542ARUZ-REEL	-40°C to +125°C	8-Lead TSSOP	Reel, 2500	RU-8	
AD8542ARZ	-40°C to +125°C	8-Lead SOIC		R-8	
AD8542ARZ-REEL	-40°C to +125°C	8-Lead SOIC	Reel, 2500	R-8	
AD8542ARZ-REEL7	-40°C to +125°C	8-Lead SOIC	Reel, 1000	R-8	
AD8544ARUZ	-40°C to +125°C	14-Lead TSSOP		RU-14	
AD8544ARUZ-REEL	-40°C to +125°C	14-Lead TSSOP	Reel, 2500	RU-14	
AD8544ARZ	-40°C to +125°C	14-Lead SOIC		R-14	
AD8544ARZ-REEL	-40°C to +125°C	14-Lead SOIC	Reel, 2500	R-14	
AD8544ARZ-REEL7	-40°C to +125°C	14-Lead SOIC	Reel, 1000	R-14	
AD8544WARZ-R7	-40°C to +125°C	14-Lead SOIC	Reel, 1000	R-14	
AD8544WARZ-RL	-40°C to +125°C	14-Lead SOIC	Reel, 2500	R-14	

<sup>1</sup> Z = RoHS Compliant Part.

<sup>2</sup> W = Qualified for Automotive Applications.

## AUTOMOTIVE PRODUCTS

The AD8544W models are available with controlled manufacturing to support the quality and reliability requirements of automotive applications. Note that these automotive models may have specifications that differ from the commercial models; therefore, designers should review the Specifications section of this data sheet carefully. Only the automotive grade products shown are available for use in automotive applications. Contact your local Analog Devices account representative for specific product ordering information and to obtain the specific Automotive Reliability reports for these models.